

Multiple Section Louvre//Type ACL1MS

Specification:




For louvre sizes 2400 x 2400 these are supplied as multi-section. For strengthening, the units are supplied with framework as shown.

Fixing:

The support framework is first fitted to the structural opening, the louvre units are then secured by fixing into the framework.

Installation:

If required we have our own team of experienced fitters who can install large louvre units. Should you require this facility then please contact the head office for details.

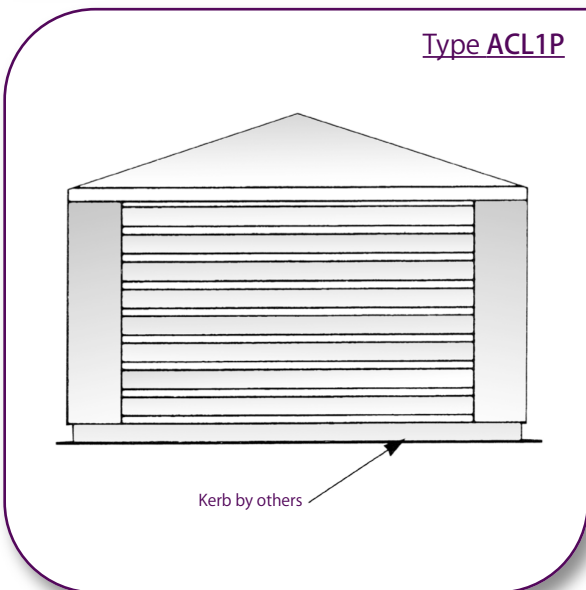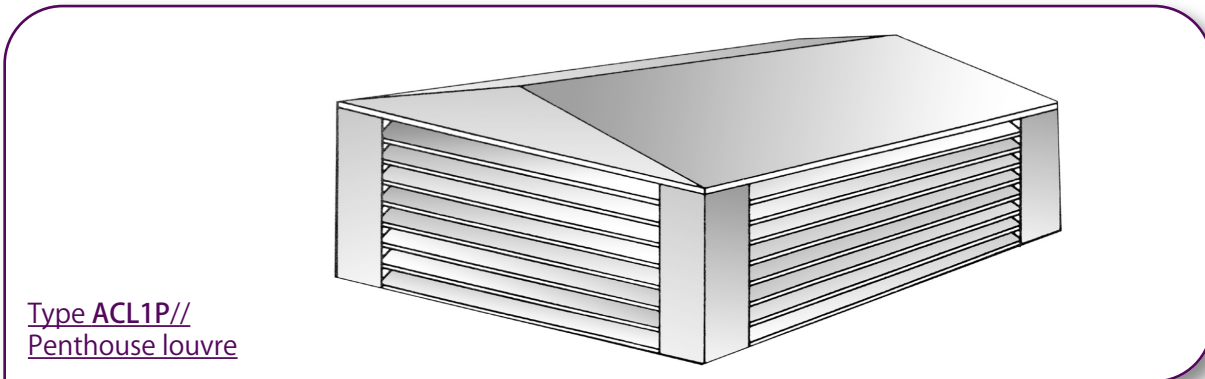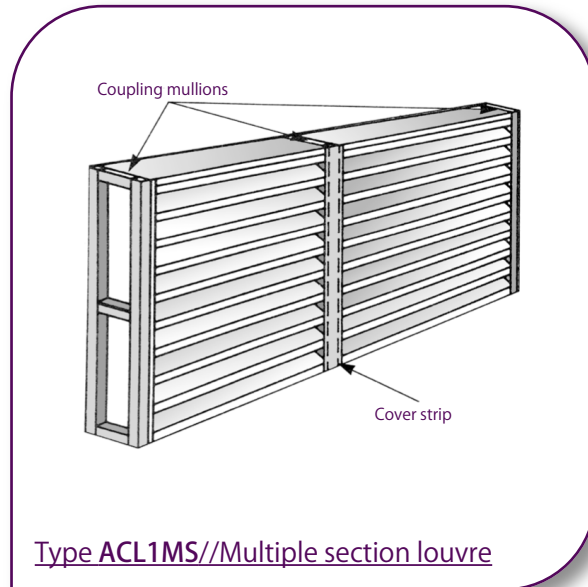

Penthouse Louvre//Type ACL1P

Specification:

The penthouse louvre is made up of single louvre units, with the corner being fixed together by angle brackets and covered with a corner flashing.

Fixing:

The penthouse is supplied in sections and bolted together using M6 bolts. The base is then secured to the kerb by fixing through the base of the louvre.

Installation:

When specifying your requirements please state the over kerb size. The penthouse is manufactured so that there is a 20mm overhang all the way round.