


## Spring & Neoprene Hangers// Type SNH


Type SNH spring hangers comprise steel springs mounted in a steel housing

with a neoprene insert located in the top of the mount.

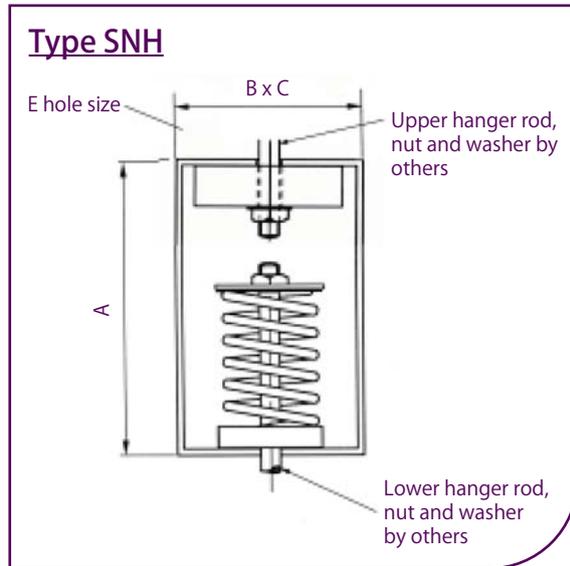

The springs are retained between steel top and bottom load plates.

The hanger rods, by others, are passed through the spring and neoprene components and held with a nut and washer.

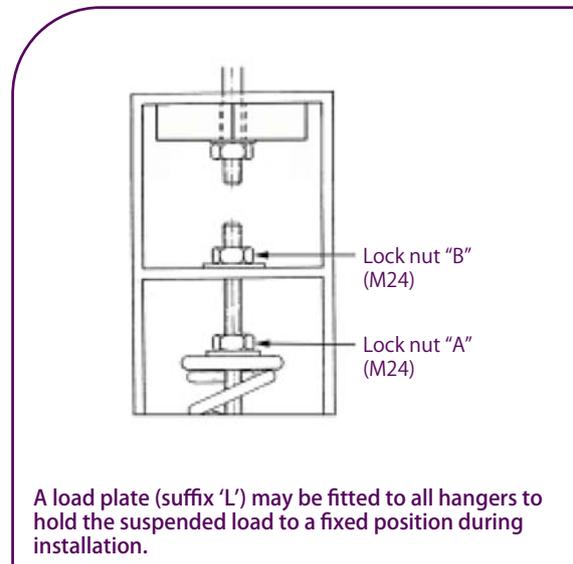

A load plate (suffix 'L') may be fitted to all hangers to hold the suspended load to a fixed position during installation.

### Dimensional Data

Type	A	B	C	D
HOS/0	150	100	80	M12*
HOS/1	250	150	100	M16°

\*exceptionally M16/ °exceptionally M20

### Dimensional Data mm

Mount Type	Dimensional Data mm					Weight Range Kg	Nom Defl mm
	A	B	C	D	E		
SH/1/25/1	150	100	80	-	14	11-1100	25
SH/1/25/2	250	150	100	-	14	425-2400	25
SH/1/50/1	250	150	100	12	18	11-454	50
SH/1/50/2	350	150	100	16	18	455-909	50
SH/1/75/1	250	150	100	12	18	11-454	75
SH/1/75/2	350	150	100	16	18	455-909	75
SH/1/100/1	370	210	180	12	14	11-299	100
SH/1/100/2	400	235	250	16	20	300-600	100
SH/1/100/3	485	260	300	16	20	601-1600	100